



IP54 BOLLARD

VLCZ-681C11-400 / 681D11-600

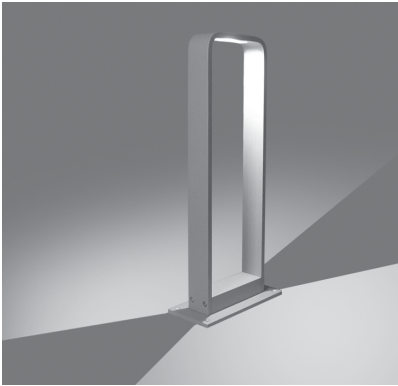


Dimension (mm) : (L)150 x (W)50 x (H) 400 & 600mm
 Power (W) : 3W
 INPUT VOLTAGE : 220-240V, 50/60Hz
 Lamp Source : 1 x 3w CITIZEN LED. Built-in LED Driver
 Color Temperature : 2700K Warm White
 Construction : Cast and extruded aluminum
 Finished color : White / Black / Grey / Graphite
 Dimming Options : None



VLCZ-684C11-40




Dimension (mm) : (L)150 x (W)50 x (H) 400mm
 Power (W) : 9W
 INPUT VOLTAGE : 220-240V, 50/60Hz
 Lamp Source Driver : 1 x 9w CITIZEN LED. Built-in LED Driver
 Color Temperature : 3000K Warm White
 Construction : Cast and extruded aluminum
 Finished color : Grey / Graphite



VLCZ-680J13



Lamp Source : 1 x 6w CITIZEN LED
 Power (W) : 6W
 Dimension (mm) : (L)150 x (W)100 x (H) 300mm
 INPUT VOLTAGE : 220-240V, 50/60Hz
 Color Temperature (CCT) : 3000K Warm White
 Construction : Cast and extruded aluminum
 Finished color : Grey / Graphite
 Dimming Options : None
 Built-in LED Driver



Ordering Code: VLCZ - V - ZZZ - CC

Example: VLCZ-681C11-400-827-GR

V = 681CC-400, 681D11-600, 684C11-40, 680J13

CC is Fixture Color, BK = Black and GR = Grey

ZZZ = the code for color rendering and color temperature, eg. 827 = CRI >83 and CCT - 2700K; 830 = CRI >83 and CCT - 3000K; 840 = CRI >83 and CCT - 4000K.