



REEL-AUTOLIFTER Raise, Lower and Dimming by remote control

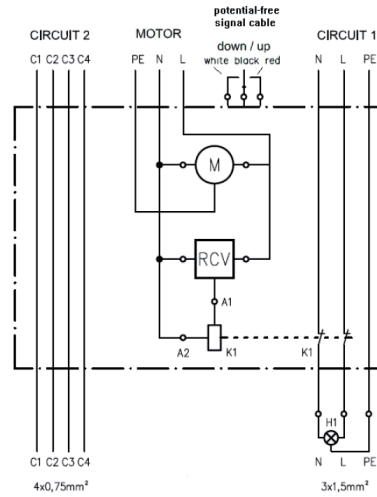



Note:
3-wire dry contact controls are provided as standard for all wireless lifters.



Handheld wireless remote controller

Compact Wireless

Compact size and easy installation makes the Compact range the preferred solution for standard applications such as highbays, lowbays, downlights and fluorescents weighing 12kg to 15kg

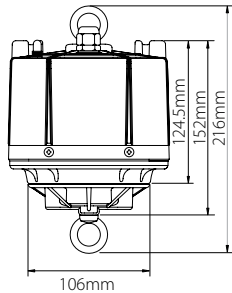

Model No.	CSI-12	CDI-15
Dimension (mm)	140(W) x 140(D) x 216(H)	
Weight (kg)	3.1kg	3.13kg
Loading Weight (kg)	3~10kg	3~15kg
Lowering Height (M)	15M	10M
Number of Wire	1	2
Wire O.D (SUS304 7x19)	1.4mm	1.2mm
Circuits capacity	16A	16A
Type of motor	DC Motor	DC Motor

Compact Wireless Multi-contact

When additional auxiliary contacts are required for DALI, emergency packs or other circuits, the Compact multi-contact version is ideal. Separate power supplies for the motor, main lamp and auxiliary contacts offer flexibility and dimming facility for loads up to 15kg.



Model No.	CSI-12M	CDI-15M
Dimension (mm)	140(W) x 140(D) x 221(H)	
Weight (kg)	3.1kg	3.13kg
Loading Weight (kg)	3~10kg	3~15kg
Lowering Height (M)	15M	10M
Number of Wire	1	2
Wire O.D (SUS304 7x19)	1.4mm	1.2mm
Circuits capacity	16A	16A
Type of motor	DC Motor	DC Motor

Mini Lifter

Wireless remote control with FM frequency mode

- Available for ascending/descending individually, in groups or the whole lightings.
- Light ON/OFF for individual light control or Programmable for 4 groups up to 1,000 lights and lifter in each group.
- Automatic stop function when descending at a preset height for maintenance.



Model No.	MSI-5	MDI-9
Dimension (mm)	160.6(W) x 167(H)	
Weight (kg)	2.2kg	2.2kg
Loading Weight (kg)	1~5kg	2~9kg
Lowering Height (M)	15M	7M
Number of Wire	1	2
Wire O.D (SUS304 7x19)	1.2mm	1.2mm
Circuits capacity	16A	16A
Type of motor	DC Motor	DC Motor

Applicabilities:

Downlights, spotlights, CCTV cameras, smoke detectors, etc.