

IP65 - T8 WEATHERPROOF LED LUMINAIRE

VHWP-9W / 18W / 36W


CRI 80 IP65 protection
Suitable for outdoor use.



1 x 18W (T8)



2 x 18W (T8)

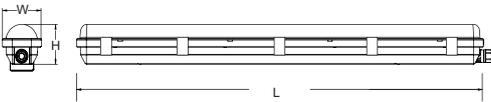

SPECIFICATIONS	DIMENSION (mm)	MOUNTING DISTANCE (mm)	CLIPS
2 x 18W T8 (36W)	L1266 x W150 x H105	858	10
1 x 18W T8 (18W)	L1266 x W98 x H103	858	10
2 x 9W T8 (18W)	L658 x W150 x H103	450	4
1 x 9W T8 (9W)	L658 x W150 x H105	450	4

A complete LED weatherproof Luminaire for direct surface mounted on wall/ceiling, wire suspension or fixed steel rod suspension. Suitable for outdoor and damp indoor areas. Low power consumption and High efficiency. Long Lifetime.


Prismatic diffuser provide even light output and high transmission. Easy and quick installation and maintenance. Durable stainless steel clips and silicon gasket is standard for this range of luminaires.

- CONSTRUCTION:**
- Housing and prismatic diffuser in PC material.
 - IP65 cable gland
 - Silicon gaskets
 - Stainless steel clips


- OPTIONAL**
- Electronic Ballast
 - T8 LED Tube

- APPLICATION**
- Parking lot
 - Shopping center
 - Parks
 - Exterior wall of buildings
 - any commercial or architectural walls

Note: Luminaires should be mounted in a shady or covered environment protected against direct sunlight and severity of the weather. Due to possible chemical reaction of polymer-based housing/diffuser, luminaire must not be installed in places where there are presences of sulphuric acid, acetone, ammonia, Ethyl alcohol, mineral oil, animal fat or vegetable oil.

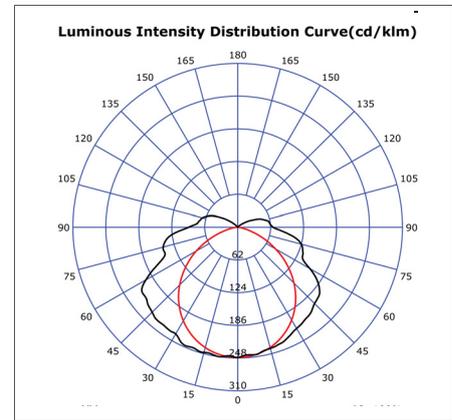

2 x 18W OPL-P-T8 (36W)/4000K
(Luminaire lumen output: 3300lm)

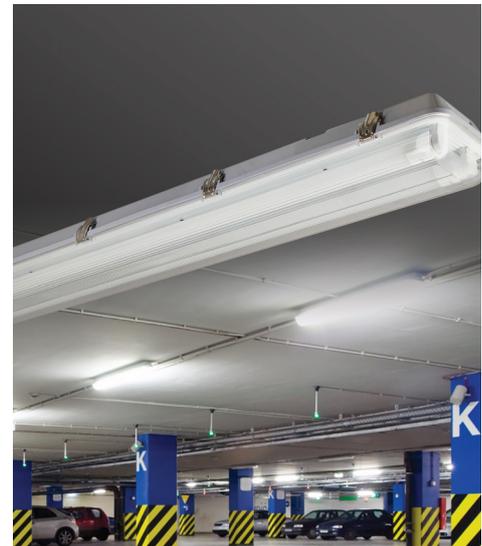

Ordering Code: VHWP - XXW - ZZZ

Example: **VHWP-2x18W-830**

XX = (Watt) e.g. 1x9W, 2x9W, 1x18W, 2x18W

ZZZ = the code for color rendering and color temperature, eg. **827** = CRI >80 and CCT - 2700K; **830** = CRI >80 and CCT - 3000K; **840** = CRI >80 and CCT - 4000K